


NOTES:

1. 1/2" ASPHALT IMPREGNATED W/ FIBERBOARD EXPANSION MATERIAL CONFORMING TO AASHTO M213 IS TO BE PLACED AT ALL DRIVEWAYS, AT MAXIMUM 200' INTERVALS, OR AS DIRECTED BY ENGINEER.
2. TRANSVERSE JOINTS TO BE PLACED AT 5' INTERVALS PERPENDICULAR TO SIDEWALK.
3. SAWED JOINTS SHALL BE USED INSTEAD OF TOOLED JOINTS. ALL SAWED JOINTS SHALL BE SEALED USING AN APPROVED SEALANT.
4. OTHER JOINTS MAY BE REQUIRED IF DIRECTED BY THE ENGINEER.
5. CONCRETE FOR SIDEWALK TO BE CLASS A, 3000 PSI, 5.5 BAG MIX W/ 4-7% AIR ENTRAINMENT.

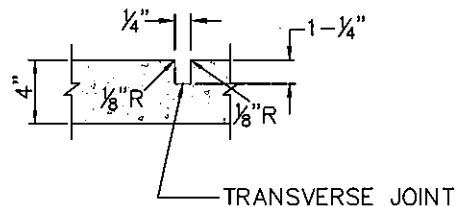

## SIDEWALK DETAIL

NOT TO SCALE


The City of Springdale's Standard Details are minimum requirements for construction in Springdale. Use of these details for any construction project must be reviewed, approved and plans sealed by an Arkansas Registered Professional Engineer.

### STANDARD DETAILS FOR STREET & DRAINAGE CONSTRUCTION

### SECTION B TYPICAL STREET, DRIVEWAY & SIDEWALK DETAILS

DATE: OCTOBER 2018  
DESIGNED BY: STAFF  
DRAWN BY: STAFF

FILE NO. SD-B-1



**SPRINGDALE**  
WE'RE MAKING IT HAPPEN