



**H-1 LINTEL/HEAD DETAIL**  
1"=1'-0"

**H-2 HEAD DETAIL**  
1"=1'-0"

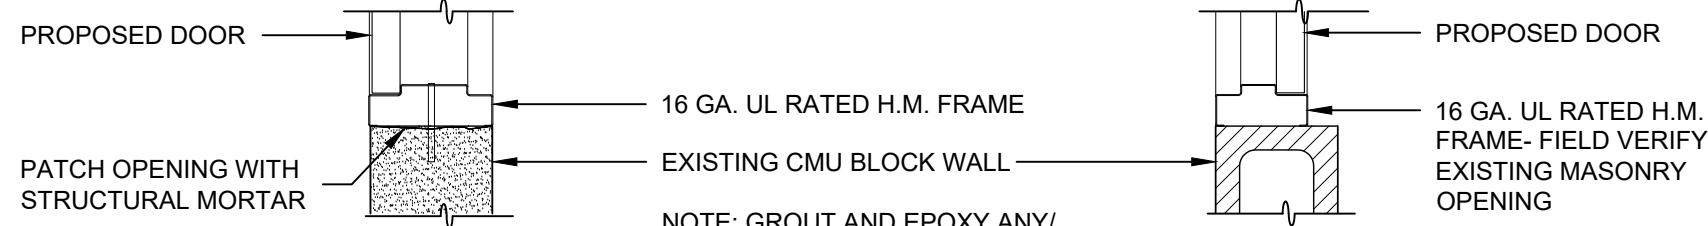


**J-1 JAMB DETAIL**  
1"=1'-0"


**J-2 JAMB DETAIL**  
1"=1'-0"

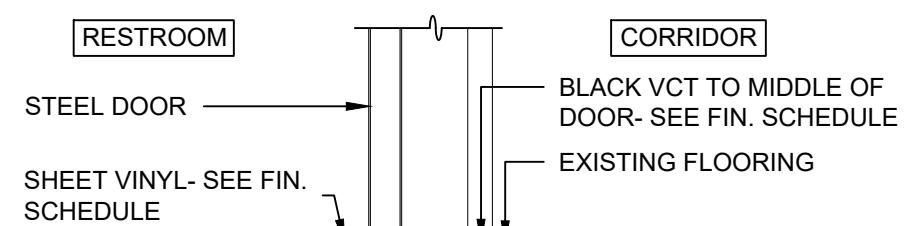


**S-1 JAMB DETAIL**  
1"=1'-0"

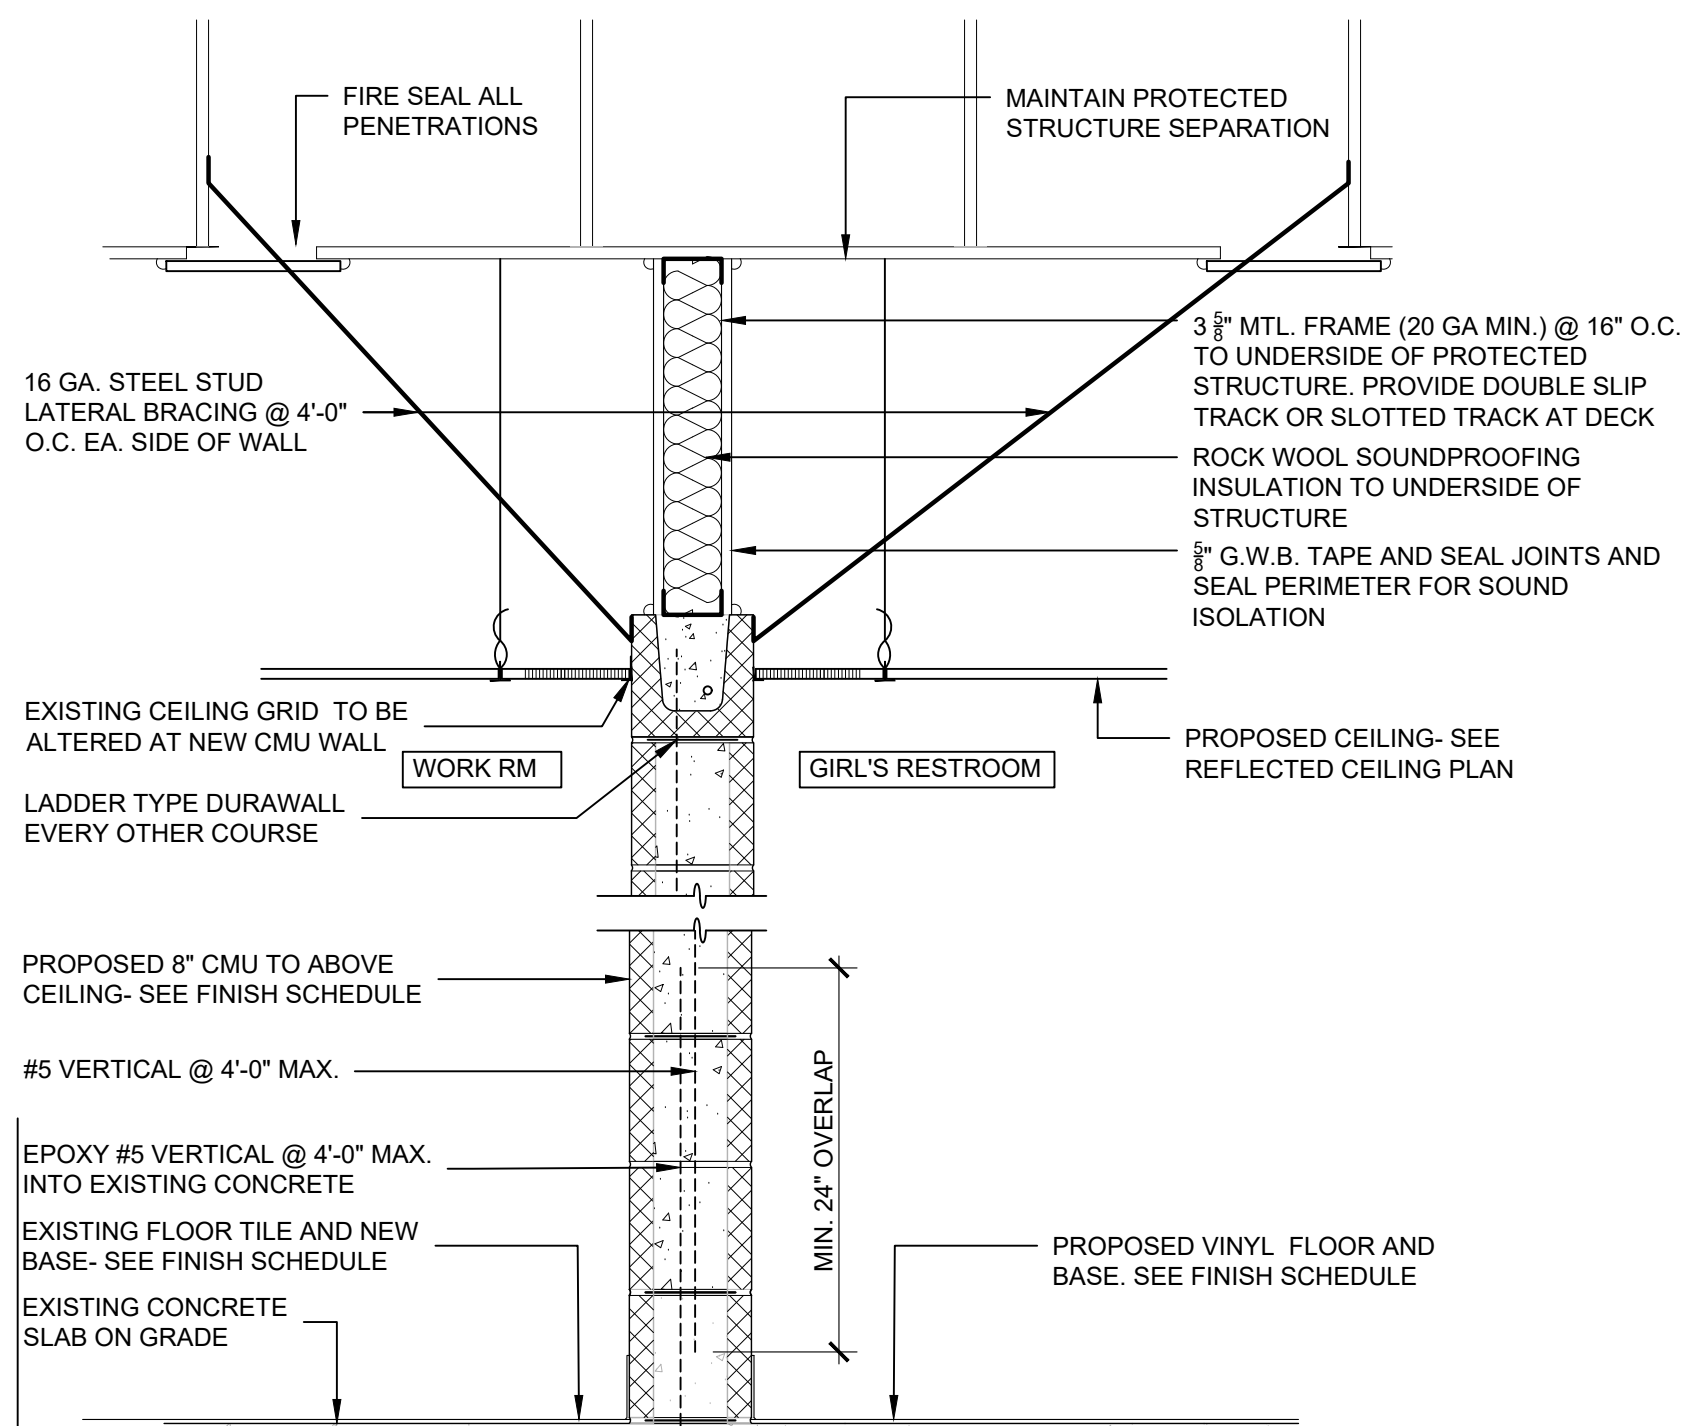


**5 CMU WALL SECTION**  
1"=1'-0"

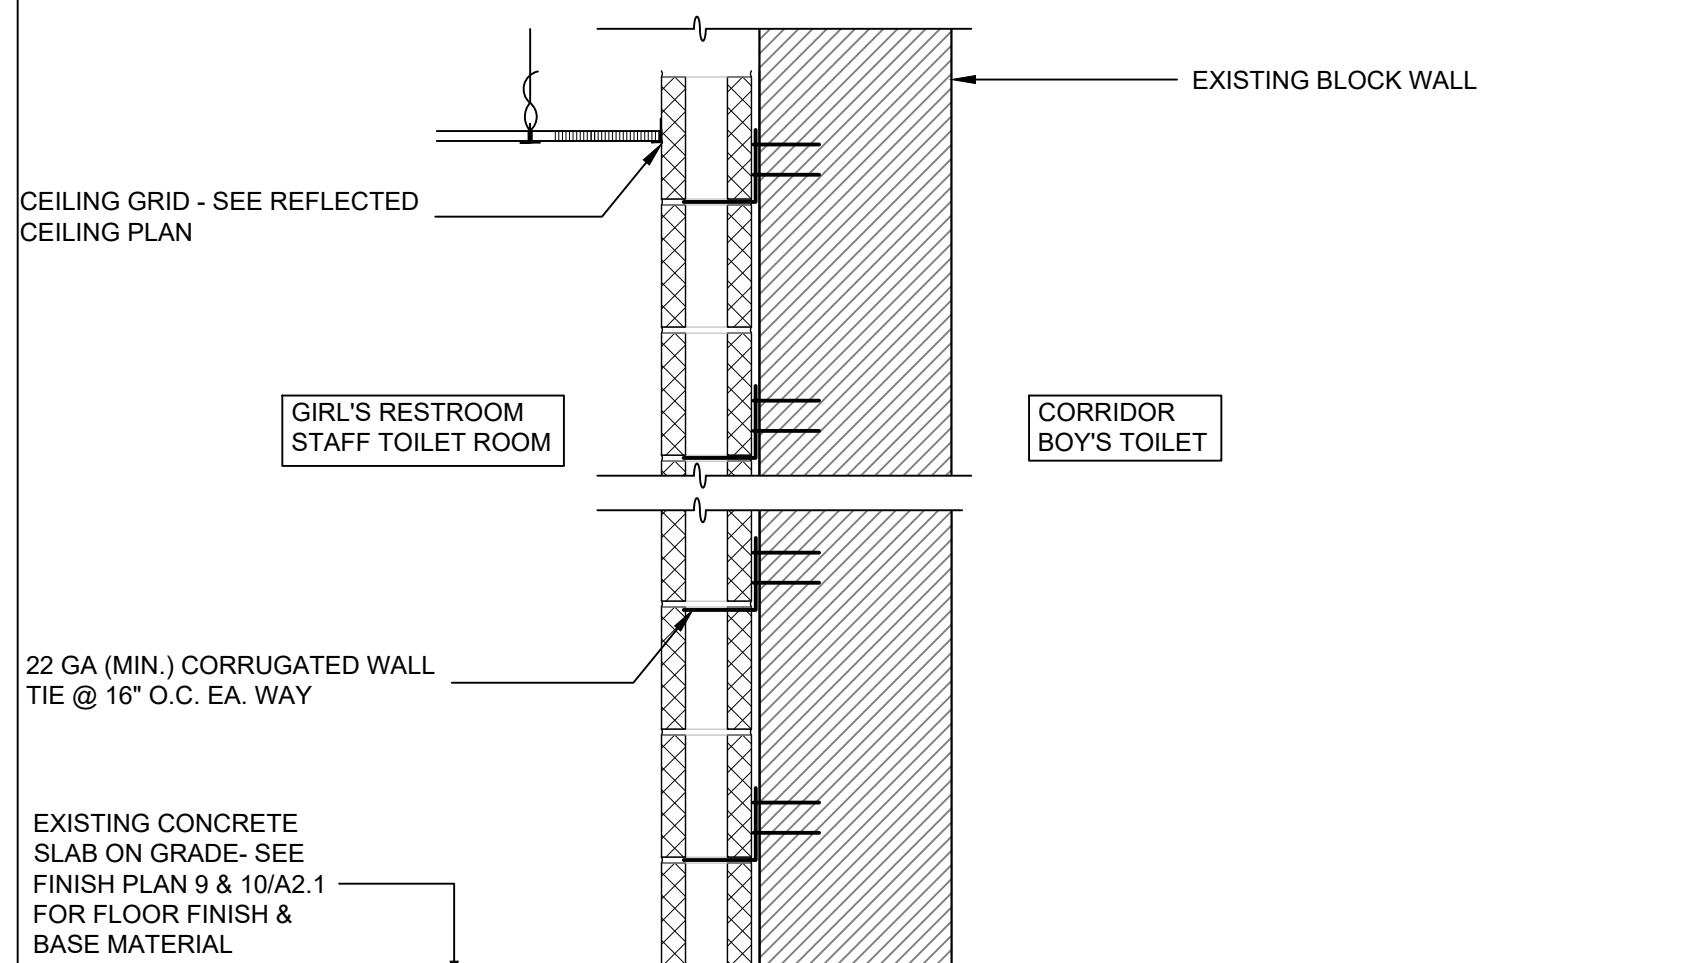


**6 CMU WALL SECTION**  
1"=1'-0"

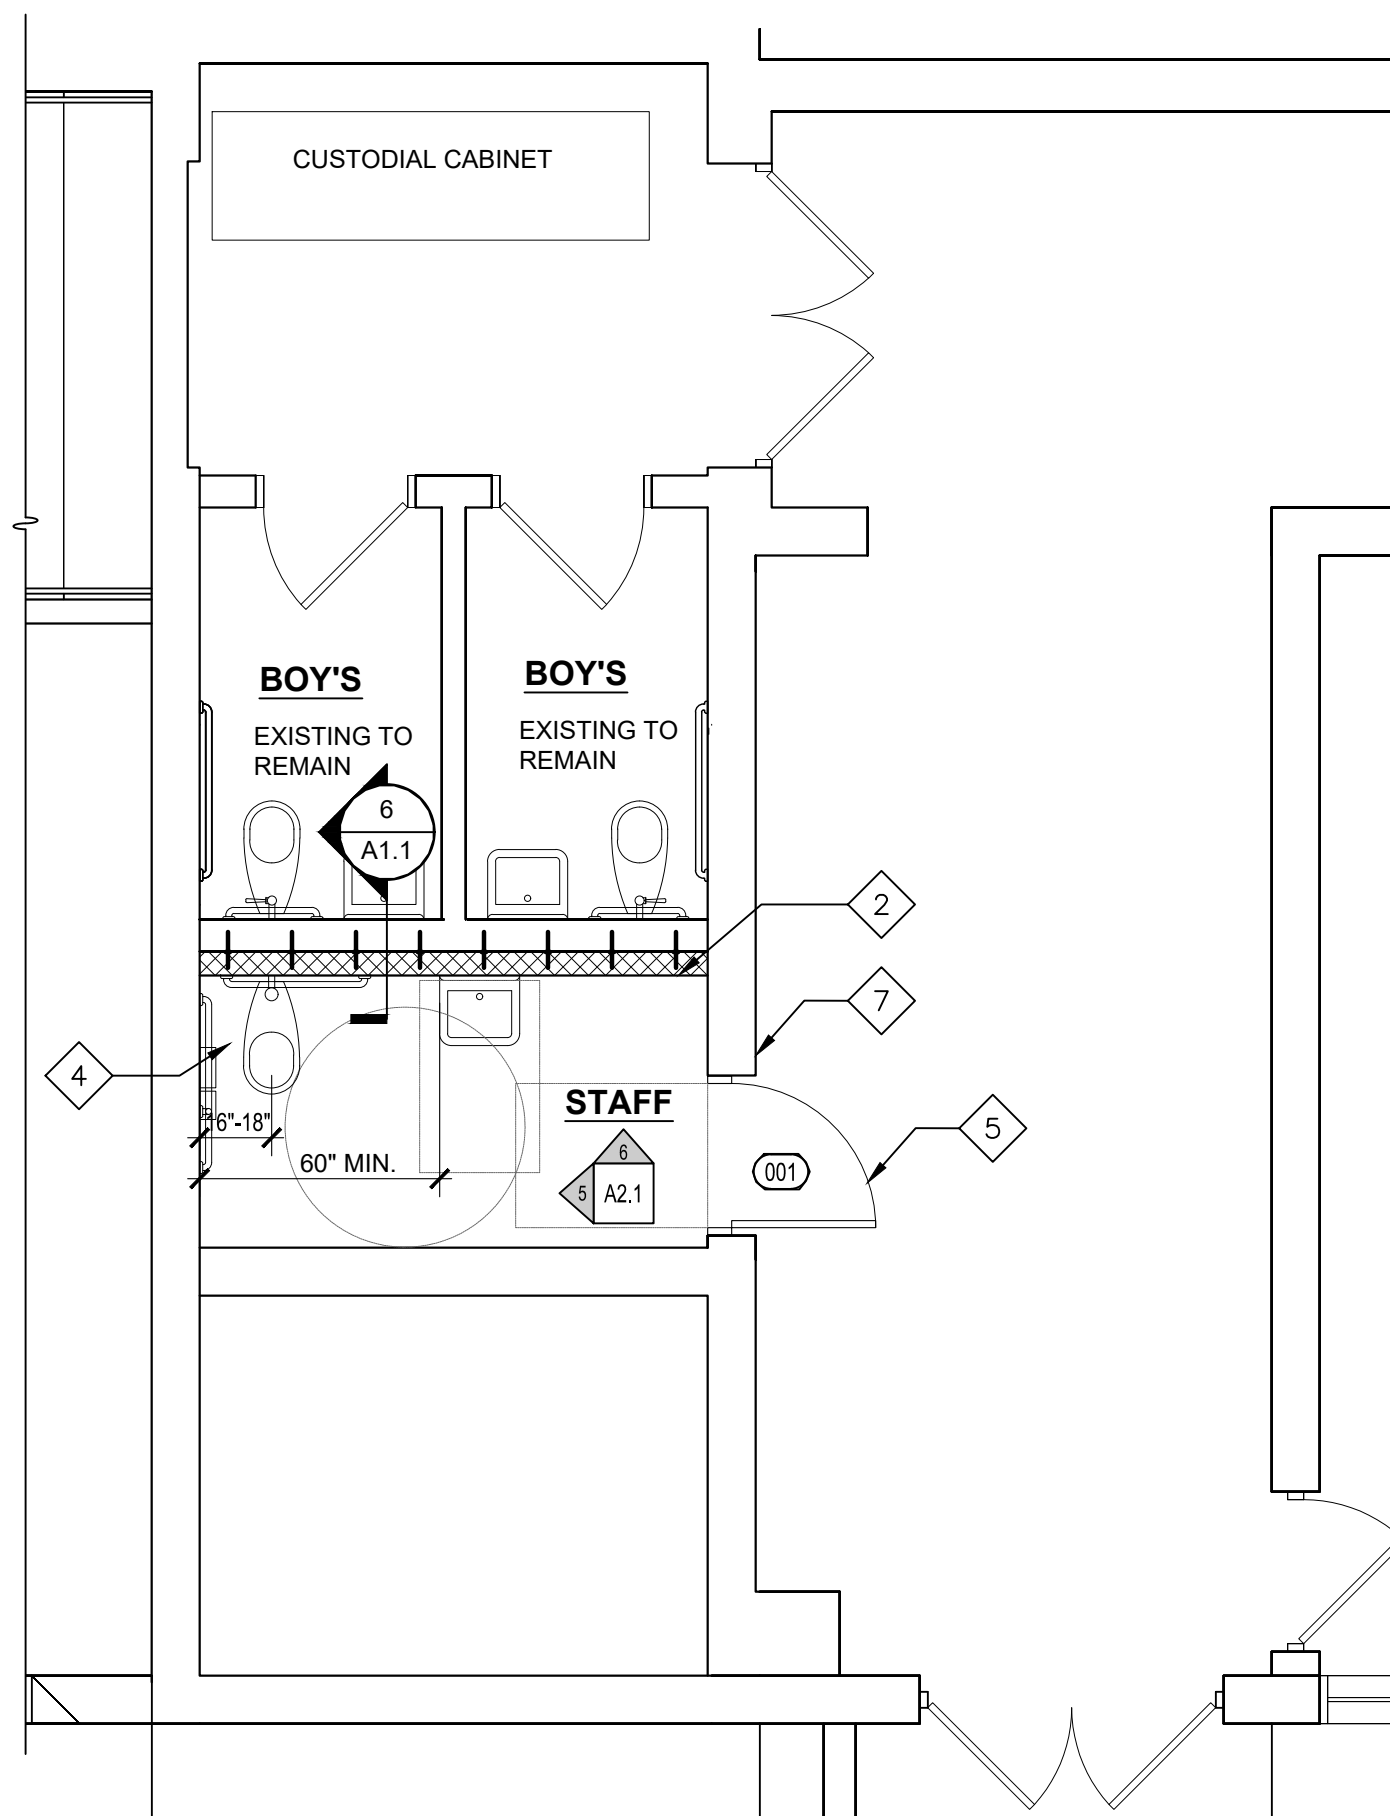


**3 ENLARGED PLAN- PROPOSED**  
1/4"=1'-0"

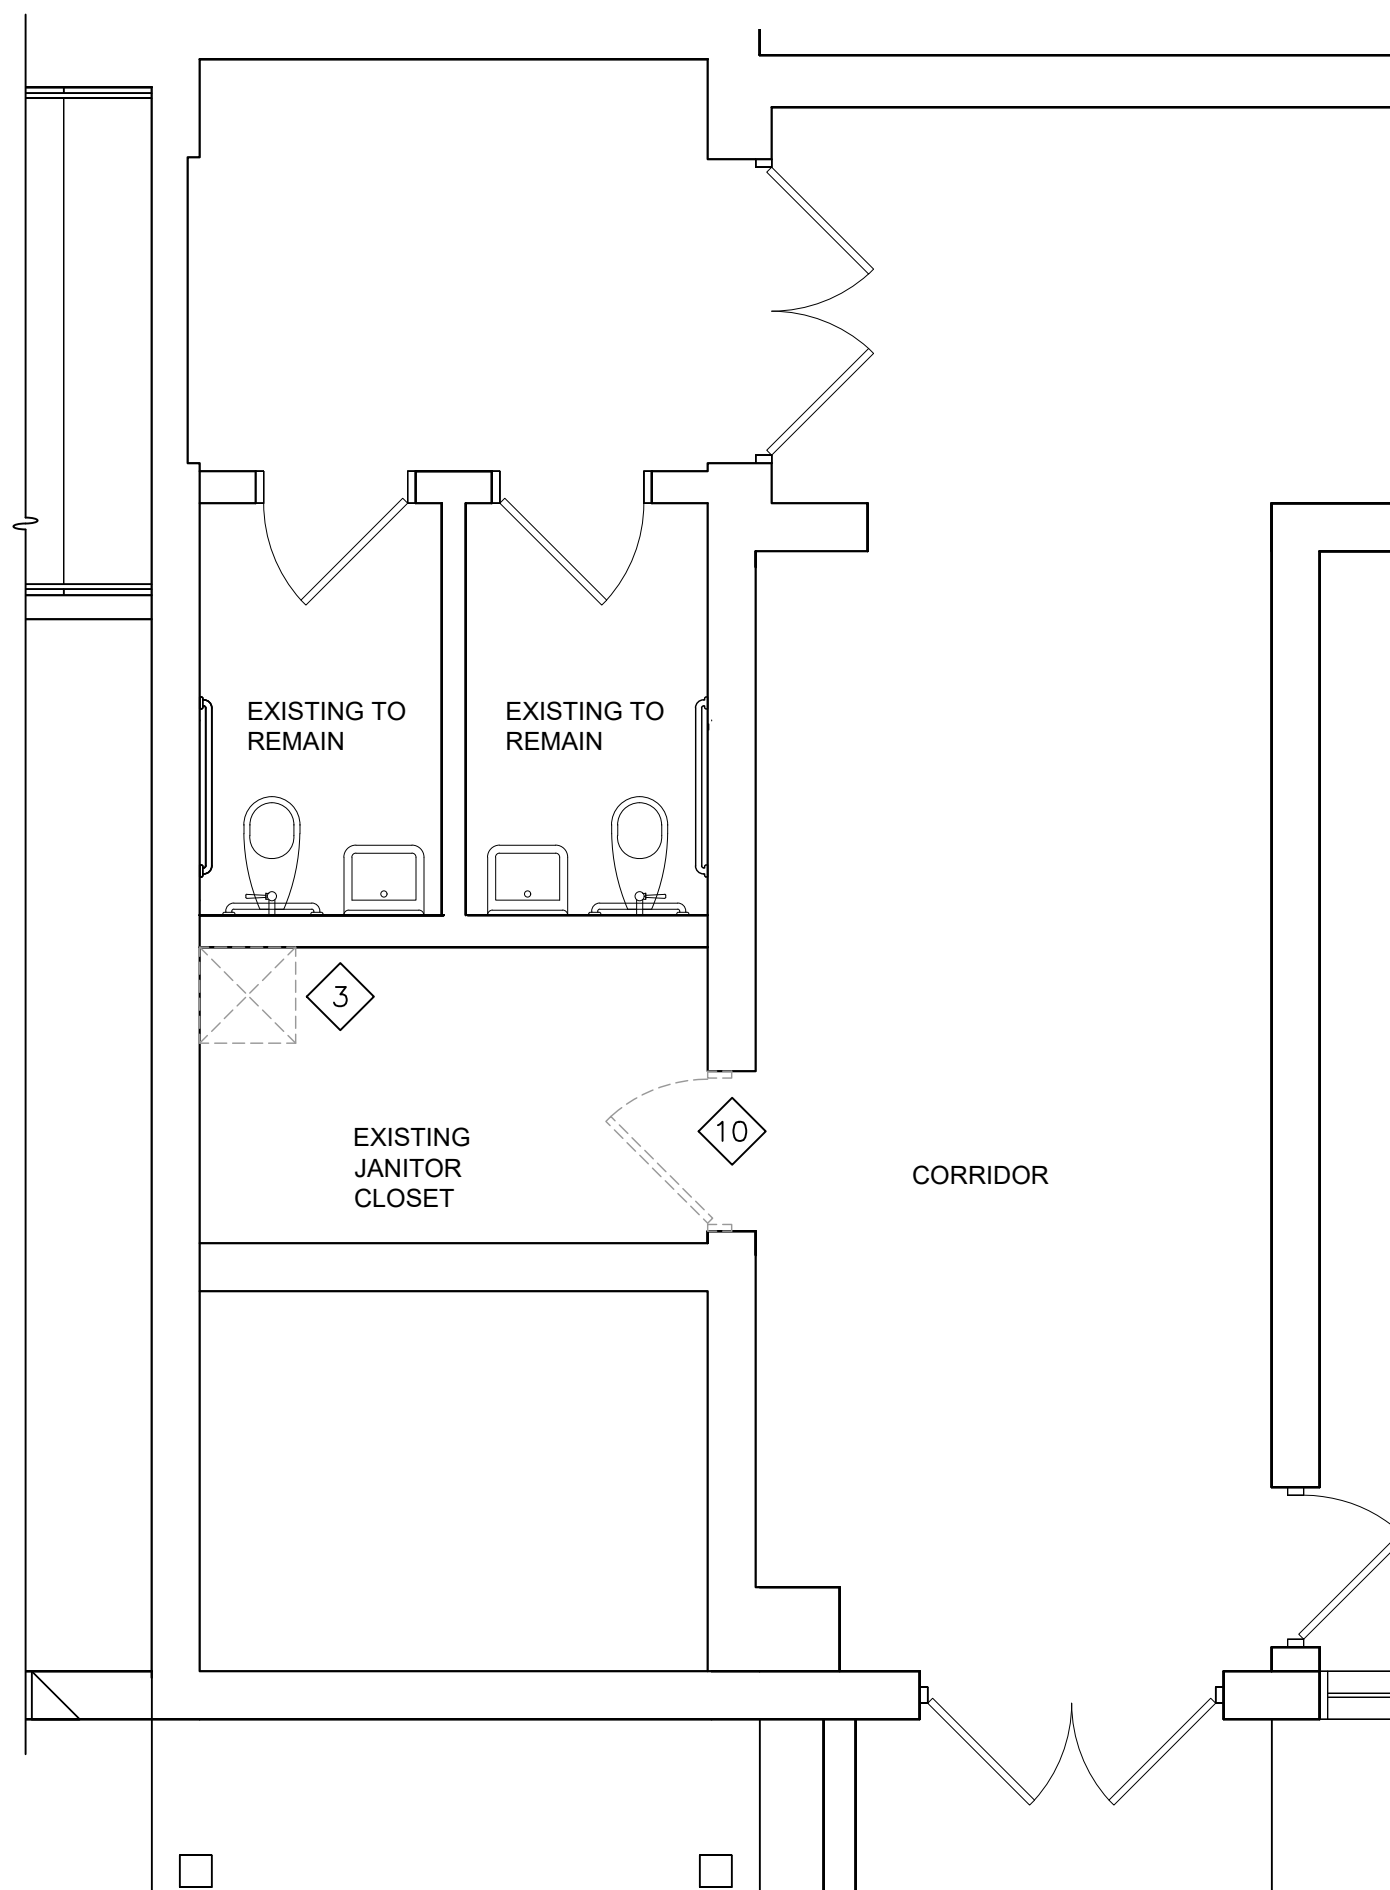

**4 DEMOLITION PLAN**  
1/4"=1'-0"

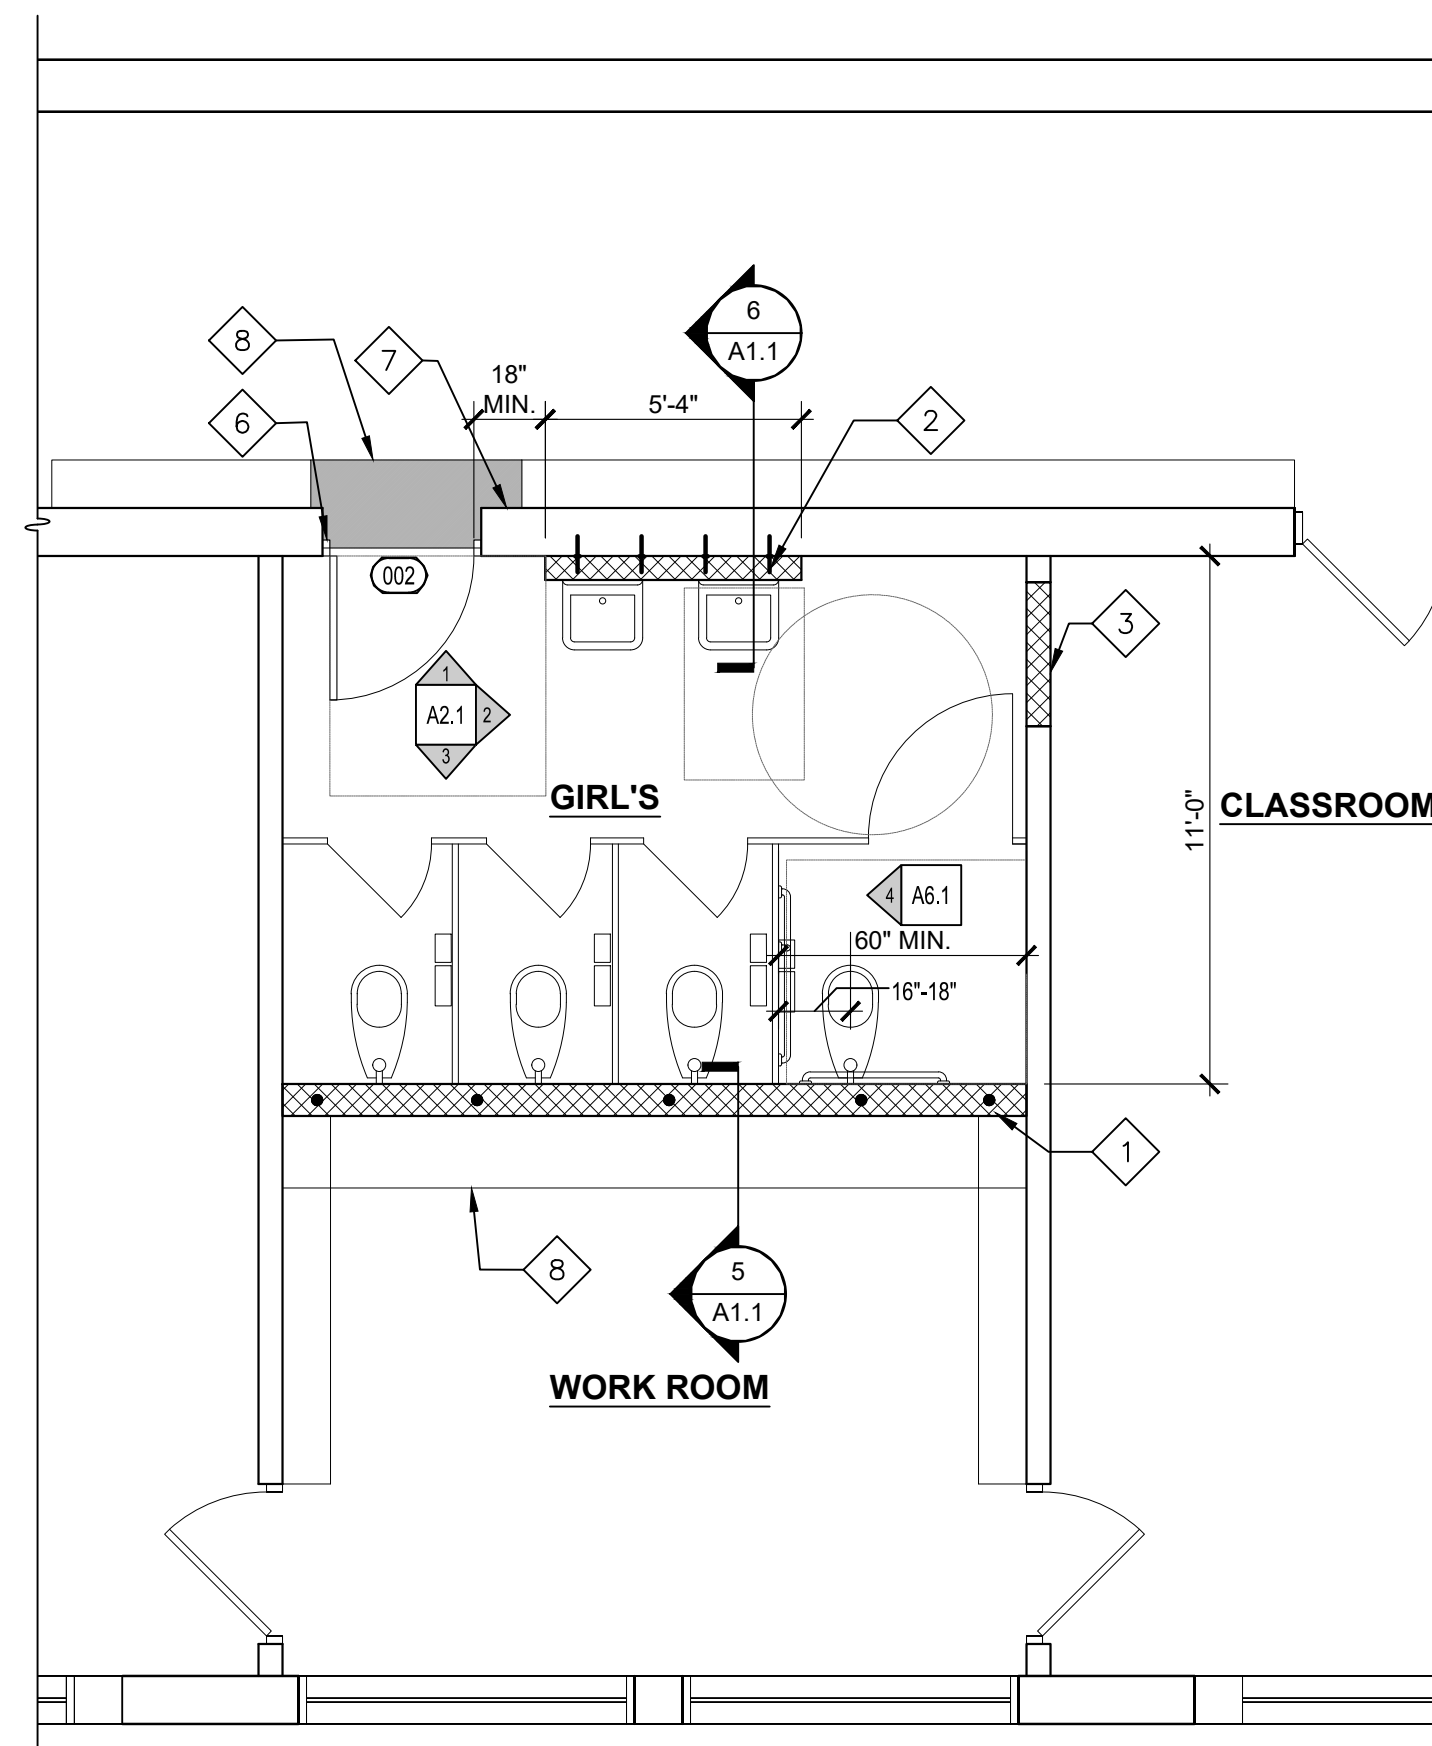

**1 ENLARGED PLAN- PROPOSED**  
1/4"=1'-0"

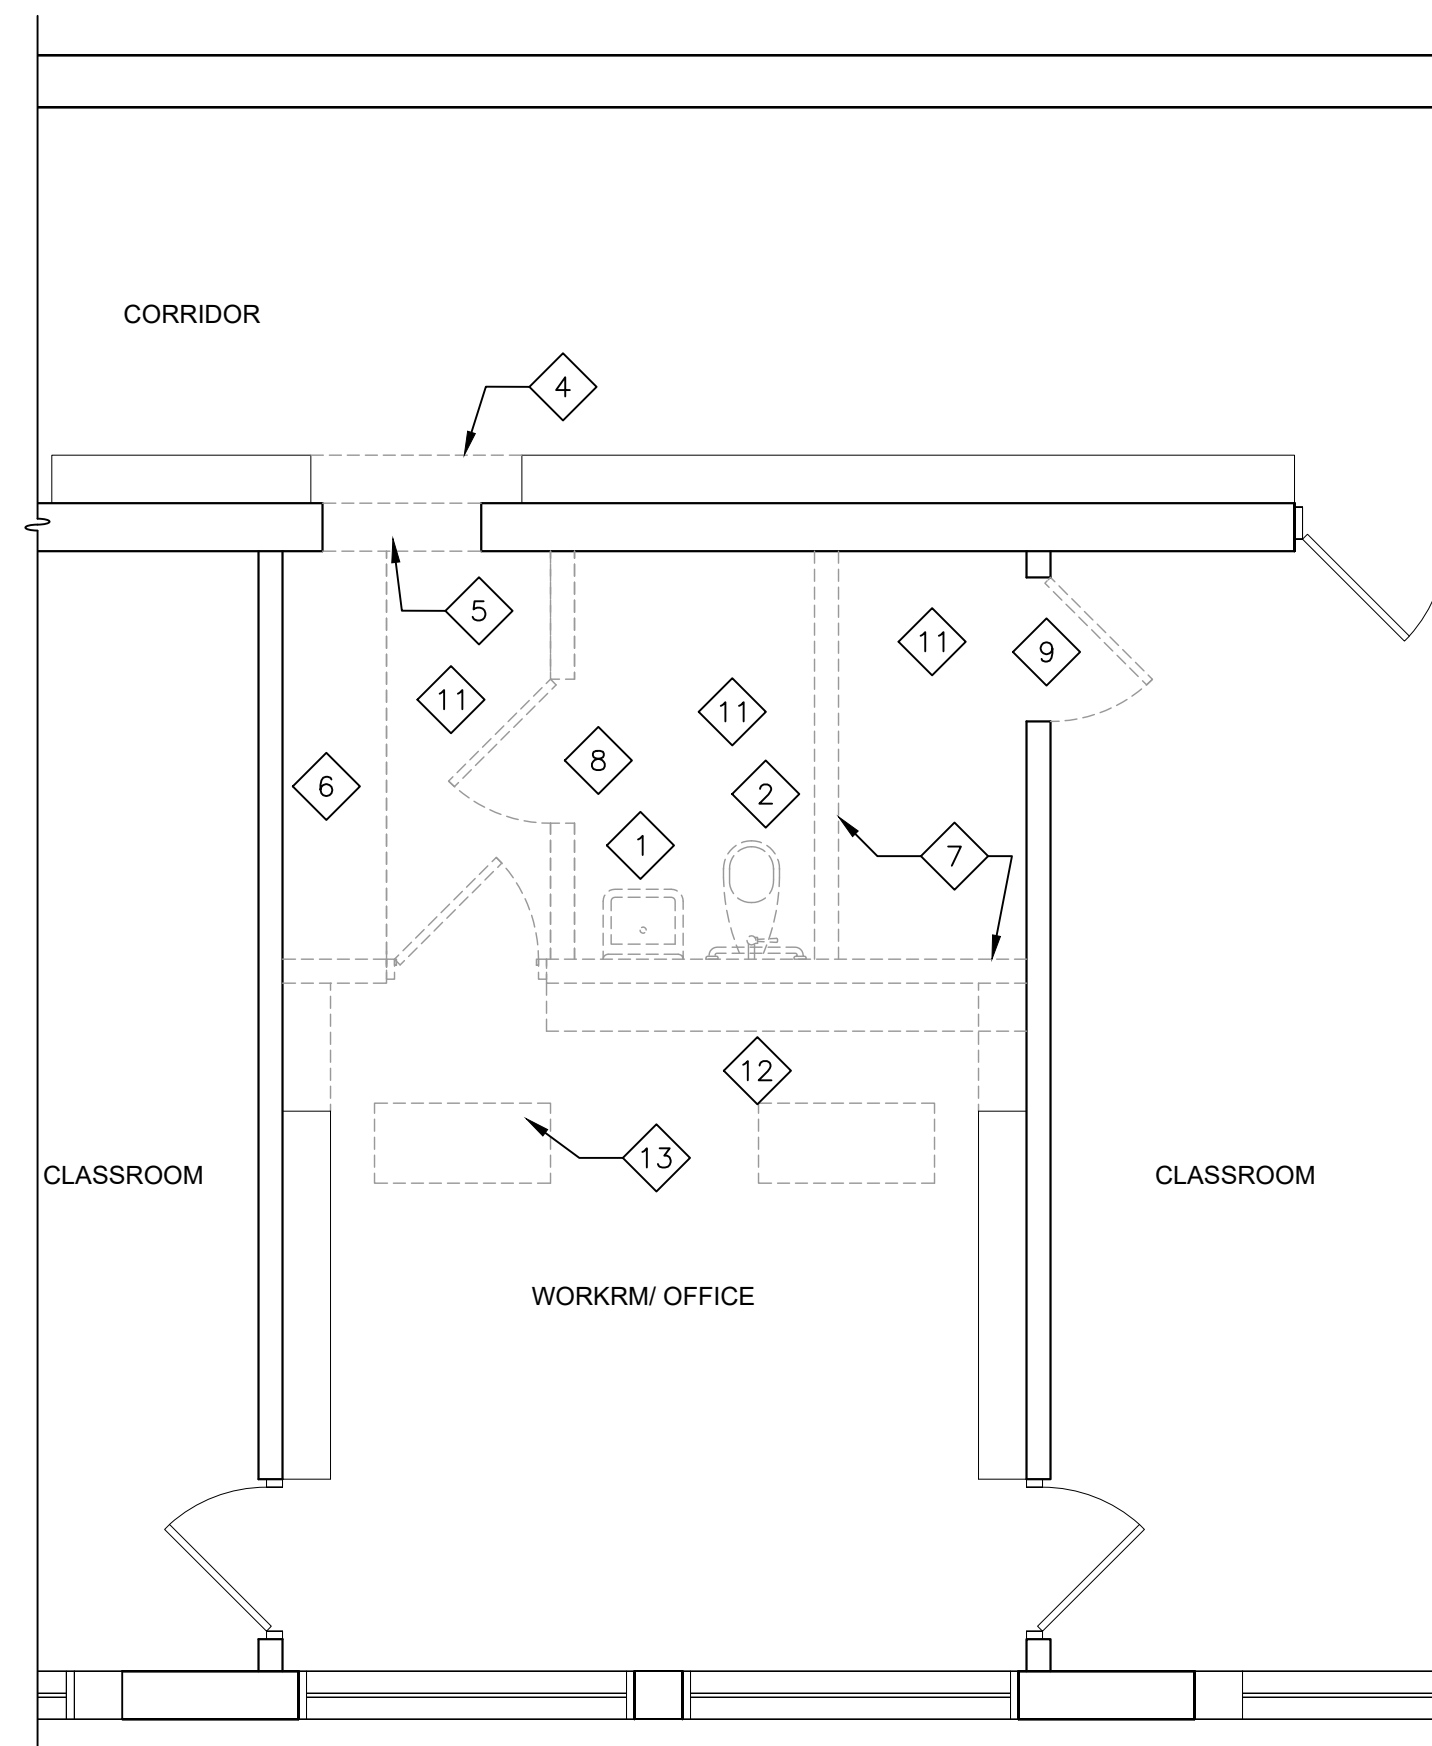

**2 DEMOLITION PLAN**  
1/4"=1'-0"

**GENERAL NOTES**

- 1) REPAIR WALLS TO REMAIN WHERE, PLUMBING FIXTURES AND OTHER UTILITIES ARE REMOVED, INCLUDING DAMAGE PRIOR TO START OF WORK
- 2) SEE SHEET A2.1 FOR FIXTURES AND ACCESSORIES SCHEDULE.
- 3) IN STAFF TOILET AND GIRL'S RR- ALL EXPOSED WALL SURFACES TO BE PAINTED. PAINT WALLS WITH COMPATIBLE PRIMER AND WATER BASED CATALYZED EPOXY PAINT. SEE A2.1 FOR FINISH PLAN
- 4) FLOOR LEVELING: AS REQUIRED BY FLOORING MANUFACTURER FOR INSTALLATION OF NEW VINYL FLOORING.
- 6) REPAIR ALL PENETRATIONS TO CEILING "PROTECTED" ROOF STRUCTURE EXISTING AND NEW. WHERE ROOF STRUCTURE IS EXPOSED, PROTECT WITH 1 LAYER 5/8" TYPE X GYPSUM BOARD, TAPED AND FIRE SEALED
- 7) CONTRACTOR TO VERIFY ALL DIMENSIONS AND QUANTITIES IN FIELD.
- 8) ALL UNDERGROUND PLUMBING TO BE SCHEDULE 40 PVC.

**KEYED NOTES- PROPOSED**

- 1 PROVIDE NEW CMU WALL PER SECTION 5/A1.1
- 2 PROPOSED 6" CMU WALL TO ABOVE CEILING- CORRUGATED BRICK TIES @ 16" O.C. EA. WAY SEE SECTION 6/A1.1
- 3 INFILL EXISTING DOOR OPENING W/ BLOCK TO MATCH- PATCH AND PAINT- BOTH SIDES
- 4 PATCH WITH 2"x2" CERAMIC MOSAIC TILE WHERE SERVICE SINK IS TO BE REMOVED. MATCH EXISTING TILE
- 5 NEW DOOR AND FRAME IN EXISTING BLOCK OPENING. SEE H-2, J-2 AND DOOR SCHEDULE.
- 6 NEW DOOR AND FRAME IN PROPOSED OPENING. SEE H-1, J-1, S-1 AND DOOR SCHEDULE.
- 7 PROVIDE NEW RESTROOM SIGN TO MEET ADA REQUIREMENTS
- 8 PROVIDE AND INSTALL 16 LF (3" X 18" D) MELAMINE SHELVING ON HEAVY DUTY STANDARDS AND BRACKET @ 16" O.C.

**GENERAL DEMOLITION NOTES**

1. REMOVE & DISPOSE OF WALLS, DOORS, FINISHES, FIXTURES & ALL ITEMS NECESSARY FOR UPFIT AS SHOWN IN DRAWINGS. PROTECT ADJACENT SPACES FROM DEMOLITION ACTIVITIES & DUST. REMOVE ALL OR PORTION OF FLOOR SLAB AS NECESSARY TO CAP, REPLACE & MODIFY IN-SLAB DWV PIPING, FLOOR DRAIN ETC.
2. PATCH AND REPAIR WHERE DEMOLITION OCCURS TO MATCH EXISTING FINISHES. REPAINT WALL NEAREST CHANGE OF SURFACE.
3. DEMOLITION / DISTURBANCE OF LEAD CONTAINING MATERIALS TO BE IN COMPLIANCE WITH CURRENT CODES.

**KEYED NOTES DEMOLITION**

- 1 REMOVE LAVATORY & STORE FOR RE-USE
- 2 REMOVE WATER CLOSET & ELECTRONIC FLUSH VALVE STORE FOR RE-USE
- 3 REMOVE MOP SINK AND STORE FOR REUSE
- 4 REMOVE LOCKERS AS REQUIRED AND RE-INSTALL PER OWNER
- 5 INSTALL LINTEL AND REMOVE WALL PER 5/A1.1
- 6 REMOVE BUILT-INS AND MISC.
- 7 REMOVE EXISTING BLOCK WALLS AS SHOWN
- 8 REMOVE WALLS AND DOORS AS SHOWN
- 9 REMOVE DOOR AND FRAME
- 10 REMOVE DOOR AND FRAME
- 11 REMOVE FLOORING: INCLUDES ASBESTOS CONTAINING TILE
- 12 REMOVE EXISTING SHELVING AS NECESSARY FOR NEW WALL
- 13 REWORK EXISTING CEILING GRID AND RELOCATE LIGHT FIXTURES IN AREA OF NEW WALL. SEE ELECTRICAL DRAWINGS.

