

FrontRow Sound System

[Click here for Training video](#)

FRONTROW PARTS

Parts & Accessories (cont'd)

925T



925H



925T

- 1 Body-worn Transmitter (925T-216)
- 2 Behind The Neck Microphone (890-88-300-00)
- 3 Elastic Belt (AT0712)
- 4 AA Rechargeable NiMH Batteries (374-30-420-00)

925H

- 1 Handheld Transmitter (925H)
- 2 AA Rechargeable NiMH Batteries (374-30-420-00)

925C



925C

- 1 Charging Stand (925C)
- 2 Power Supply, Transmitter Charger (AT0819)

10

SPEAKER RECEIVER

4 System Features: Receiver



1. Channel A Channel Selector
2. Channel B Channel Selector
3. Antenna
4. Channel A On/Off/Volume
5. OptiVoice Selector
6. Aux-In Jack (3.5mm Mono)
7. Aux-In Volume
8. Aux-Out Jack (3.5mm Mono)
9. Aux-Out Volume
10. Channel B On/Off Volume
11. LED Indicators
12. Locator Hole



System Features: Receiver (cont'd)



1. Speaker Battery Charge Indicator
2. Main Power On/Off Switch
3. Power Cord Jack
4. Locator Hole
5. Screw Hole



MICROPHONE TRANSMITTER

System Features: 925T (cont'd)



1. Belt clip
2. Battery compartment
3. Channel selector
4. Microphone input (2.5mm)
5. 3 position power switch
6. Power and low battery indicator light



WIRELESS MICROPHONE

System Features: 925H




1. LED indicator light
2. 3 position power switch
3. Channel selector
4. Battery compartment
5. Channel selector key (inside battery compartment)



System Features: 925C

CHARGER

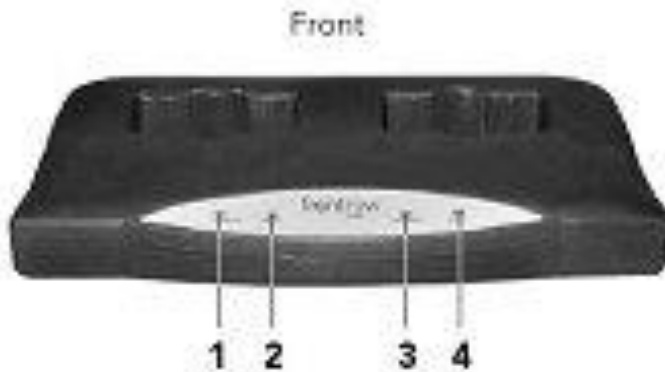

1. Pocket 1 charging indicator
2. Pocket 1 full charge indicator
3. Pocket 2 charging indicator
4. Pocket 2 full charge indicator
5. DC power jack



TRANSMITTER CHANNEL SELECTOR



1. Use a screwdriver to turn frequency selector to channel number that matches the channel on column speaker
2. If using both body-worn and hand-held transmitters set one transmitter channel to match **Channel A** on the speaker column, and the other transmitter channel to match **Channel B** channel on the speaker column.

NOTE: Never operate two transmitters on the same channel or interference will result.